



Parking Systems Signalling



Made in France

Parking Entrance Housing

Housign 1000 x 375 mm • Display 125 mm

REF : 56207

Technical specifications :


- Lacquered aluminum profile, 1000 x 375 mm.
- Single sided.
- Front panel in colorless, anti-reflective 3 mm polymethyl methacrylate.
- Front decoration in class 1 retroreflective film (50 cd/lux/m²).
- Rear panel in 30/10e aluminum with fixing rails.
- Variable message display 125 mm high 2 LEDs per point amber color 7 characters.
- Amber LED 30° 2750 mcd.
- Management terminal integrated into the box.
- IP, RS485, RS422 control on protocol to be defined + 3 priority contact inputs.
- Brightness management by day/night cell.

Options :

- Aluminum mast Ø76 length 2900 mm + 2 collars REF 60259.
- Aluminum mast Ø90 length 2900 mm + inspection hatch + 6 A fuse + 2 clamps REF 56110.
- 20 kA surge protector.
- Forced ventilation with filters.
- RAL on request.

Additional technical information :

Power supply	230 V AC
Autonomy	IP or RS protocol + Dry contact for priority messages
Thickness	156 mm (without rail)
Mode de fixation	Rear rail
Size [L x l x h]	RAL 9006
Color	60 W

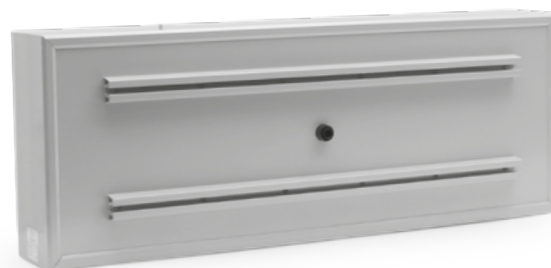

Headquarters & Manufacturing center : ZI Carros - 1^{ère} avenue, 2^{ème} rue - BP 594 - 06516 Carros cedex
Tél. +33 (0)4 92 08 29 99 - Fax +33 (0)4 92 08 29 90 - Email : info@ttsys.fr - Site web : www.ttsys.eu

ISO 9001
ISO 14001
BUREAU VERITAS
Certification



27/08/2025